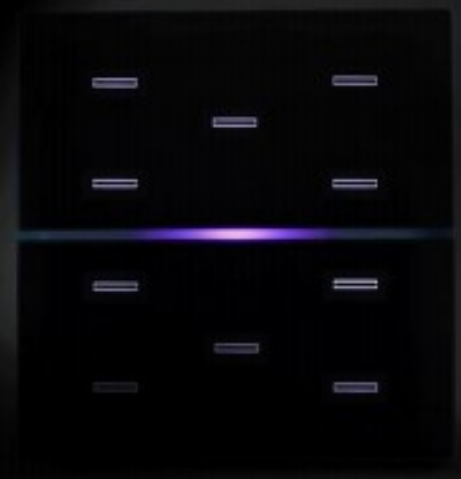


9025

evolving skills

eelectron

Building & Home Evolution


KNX

9025



Available in 5 version, up to 10 controls,
in white or black glass finishing

Standard range

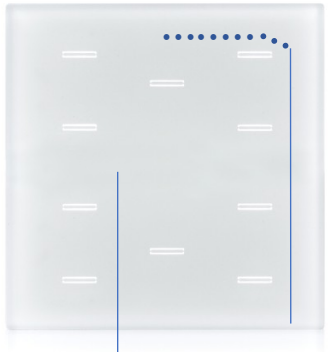

Touch Switches


ON/ OFF
SCENES
DIMMING
SHUTTERS/VENETIANS
HVAC CONTROL
RGB MANAGEMENT
DND & M.U.R. LOGIC
CONTROL SEQUENCES

EMBEDDED INPUT

ANALOG/DIGITAL



TOUCH SWITCHES WITH PROXIMITY SENSING

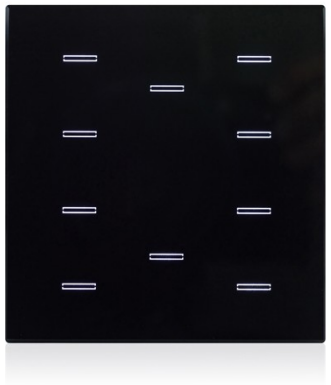

INTEGRATED TEMPERATURE PROBE / THERMOSTATIC LOGICS

eelectron

| 9025 Capacitive KNX – Switch Standard Range

The KNX® 9025 switch range consists of 2 – 4 – 6 – 8 – 10 channels capacitive buttons.

Each button can be configured to manage:


on/off commands.

Dimming.

Shutters & Curtains control.

Scene recall and control.

Objects sequences etc.

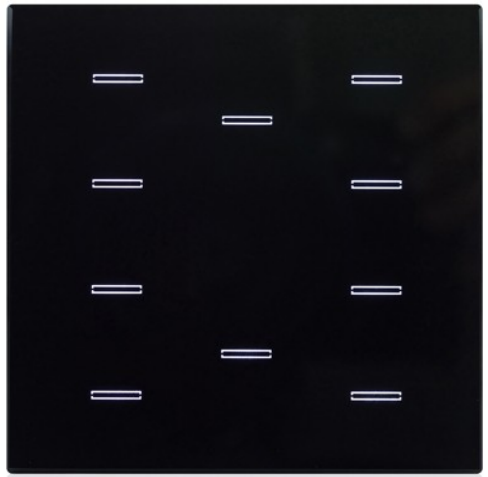

CODE:CS10A01KNX-X

9025 range has a RGB led bar on the front side in order to visualize feedbacks or other values available over the KNX bus (function available on the RGB range).Devices are available in 2 ranges: STANDARD and RGB .

| 9025 Capacitive KNX – Switch Standard Range & RGB Range modules






9025

RGB range



Available in 5 version, up to 10 controls,
in white or black glass finishing

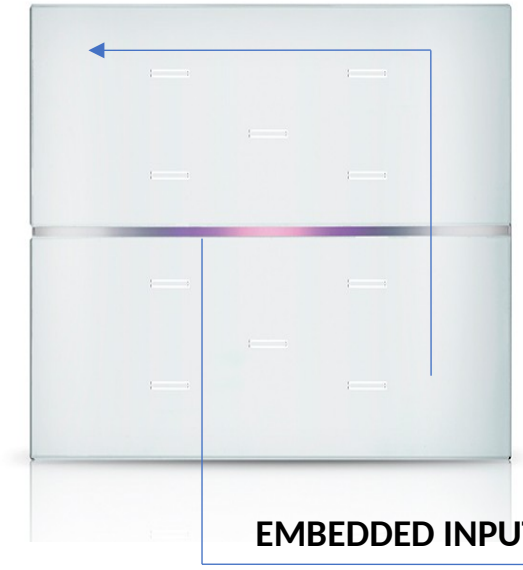

Touch Switches

ON/ OFF
SCENES
DIMMING
SHUTTERS/VENETIANS
HVAC CONTROL
RGB MANAGEMENT
DND & M.U.R. LOGIC
CONTROL SEQUENCES

EMBEDDED INPUT

ANALOG/DIGITAL



TOUCH SWITCHES WITH PROXIMITY SENSING



RGB LED BAR

TEMPERATURE
HVAC MODE
ALARM DISPLAY
STATUS DISPLAY
FEEDBACKS

eelectron

| 9025 Capacitive KNX – Switch RGB Range

•The KNX® 9025 switch range consists of 2 – 4 – 6 – 8 – 10 channels capacitive buttons.

• Each button can be configured to manage on/off commands, dimming, shutters and venetians control, scene recall and control, objects sequences etc.


•Device includes a 2 stage Room Temperature Controller with integrated PI to control heating and cooling equipment’s, valves, 2 and 4 pipes fan coils ;etc.



CODE:CS10A01KNX-X

.

| Double Glass 8 channels Modules

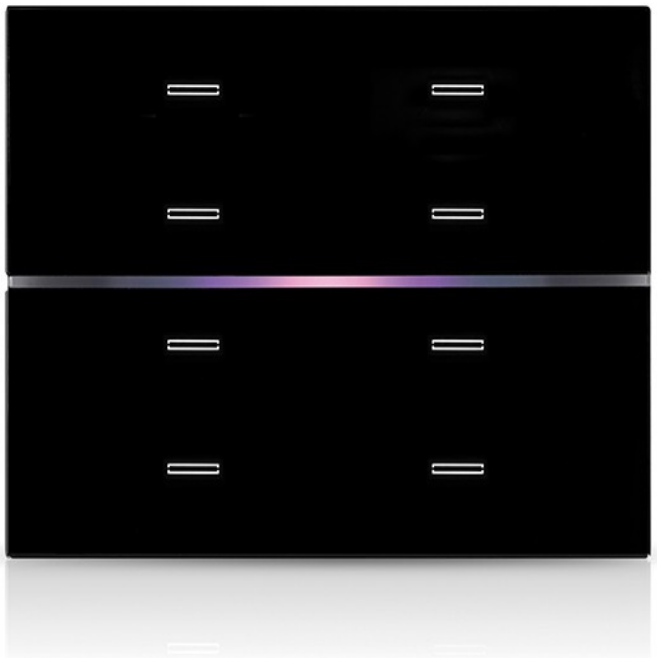

BLACK



WHITE

| Double glass channels modules



Double glass 4 channels



Double glass 10 channels

| 3025 – 55×55 KNX Switch



CODE:SB40AXXKNX-XX

SB40AxxKNX is a KNX® tactile 4 channel push button which can be configured to manage on/off commands, dimming, shutters and venetians control, scene recall and control, sequences of 3 objects, etc.

Device includes a 2 stage Room Temperature Controller with integrated PI to control heating and cooling equipment's, valves, 2 and 4 pipes fan coils; etc..

eelectron

| 4 Channels KNX Switch Module Black Color

•Minis witches KNX suitable with plates of Eelecta’s range 2 or 4 modules or Glass Frames in 3 or 4 modules.

•The range is composed by 3 models that include 1,2 or 4 channels switches with a dimension of 45×45 mm, For each channel are available 2 signaling lad's (white/blue).



| 1 & 2 Channels KNX Mini Switches Module





| 1 Channel KNX Mini Switch Module



| 2 Channels KNX Switch Module

| 4 Channel KNX Mini Switches Module



BLACK



WHITE

EELECTA Homepad KNX

CODE:PB40C1CKNX - WH



Product has 4 (8) push buttons which can be configured to manage:

Lights.

Dimmers.

Shutters & Curtains control.

4 inputs (where present) on the backside to interface free potential contacts for example:

Sensors.

Traditional buttons.

It has 5 white led in the front side.

EELECTA Homepad KNX Modules



CERAMIC WHITE - WHITE CROSS



CHROMO - BLACK CROSS



BLACK MATTE - BLACK CROSS

eelectron

| EELECTA Sockets Range Module

CODE:SK01A01ACC



Socket Plate 2 Module or Double 2 Modules dedicated for Eelecta's range.

EELECTA Sockets Range Modules



BLACK



GREY



BROWN

| EELECTA Sockets Range Swiss Modules

WHITE



BLACK




GREY

EELECTA Sockets Range Double 2 Module



WHITE

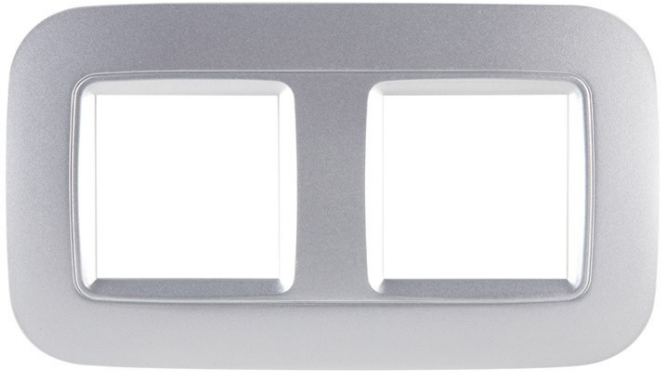

GREY



BLACK


9025



Available in Residential or Hotel version
with Humidistat option, up to 7 direct controls,
in white or black glass finishing

Thermostat / Humidistat

HUMIDISTAT LED

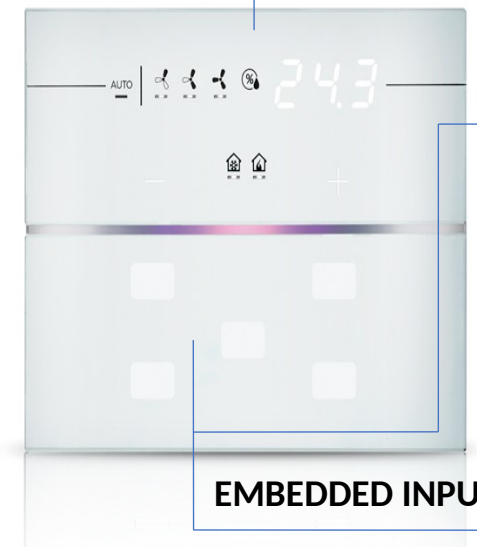


7 TOUCH SWITCHES

ON/ OFF
SCENES
DIMMING
SHUTTERS/VENETIANS
HVAC CONTROL
RGB MANAGEMENT
DND & M.U.R. LOGIC
CONTROL SEQUENCES

EMBEDDED INPUT



TOUCH SWITCHES WITH PROXIMITY SENSING

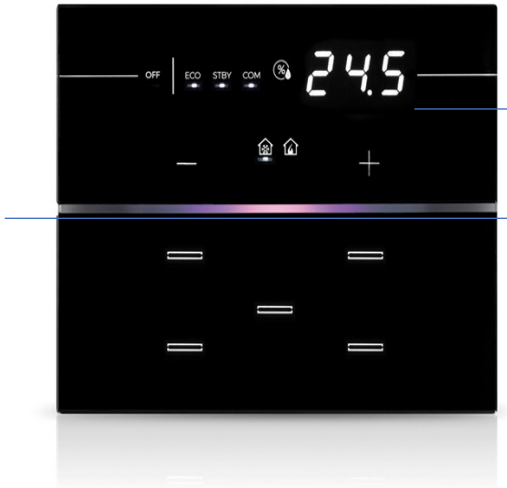

RGB LED BAR

TEMPERATURE
HVAC MODE
ALARM DISPLAY
STATUS DISPLAY
FEEDBACKS

eelectron

Thermostat Modules






eelectron

Custom Version










REPLACEABLE ICONS



REPLACEABLE ICONS

LIGHT GUIDE



Put the icon in the seat following the indicated orientation

The 9025 CUSTOM version allows the installer to associate functions to displayed icons after installing the product, using a set of preprinted icons. A simple, clear and flexible solution that delivers the highest possible customization level

| 9025 Captive KNX Thermostat\Humidistat 3 – Module

9025 Thermostat/Humidistat – 3 modules is a KNX® room temperature controller that includes 7 configurable capacitive buttons for:

on/off.

Dimming.

Rolling shutters and venetian controls.

scene recall and control.


Object sequences.

Local thermostat controls.

Device offers a 2-stage thermostat with integrated PI controller to control heating and cooling equipment's, valves, 2 and 4 pipes fan coils etc. .

A version with integrated temperature and relative humidity sensor is available usable for controlling actuators for ambient humidity control.9025 range has a RGB led bar on the front side in order to visualize thermostat .

CODE:RH07A01KNX-X

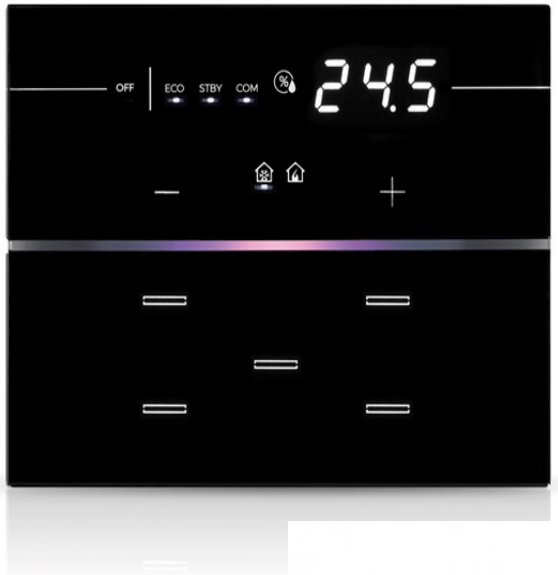

eelectron

|In wall HVAC Hotel Room Thermostat

The In-wall Room Thermostat TM10DxxKNX is an EIB/KNX wall mounting device designed for HVAC applications in Home and Building installation:

Offices

Hospitals

Hotels,


Private houses etc.

The device is equipped with one binary input (potential free contact) that can be used, for instance, to control the HVAC units whether a window has been opened (or closed) or for a general-purpose usage.

The device configuration for commissioning in terms of physical address, group addresses and parameters is done with ETS.

(Engineering Tool Software) through a download of the Application Program.

CODE:TM10D01KNX

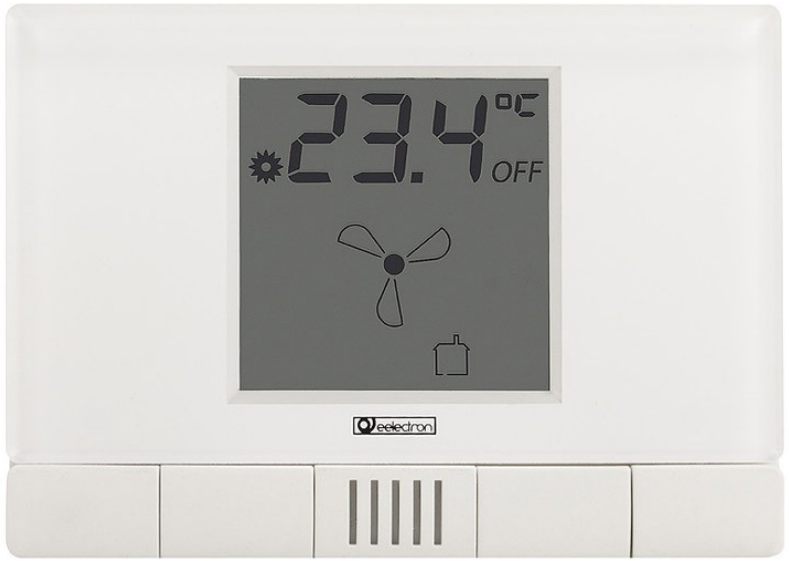

eelectron

9025



EXTERNAL **DOORPANEL**





BEDSIDE CUSTOM **PANEL**

eelectron

9025

eelectron

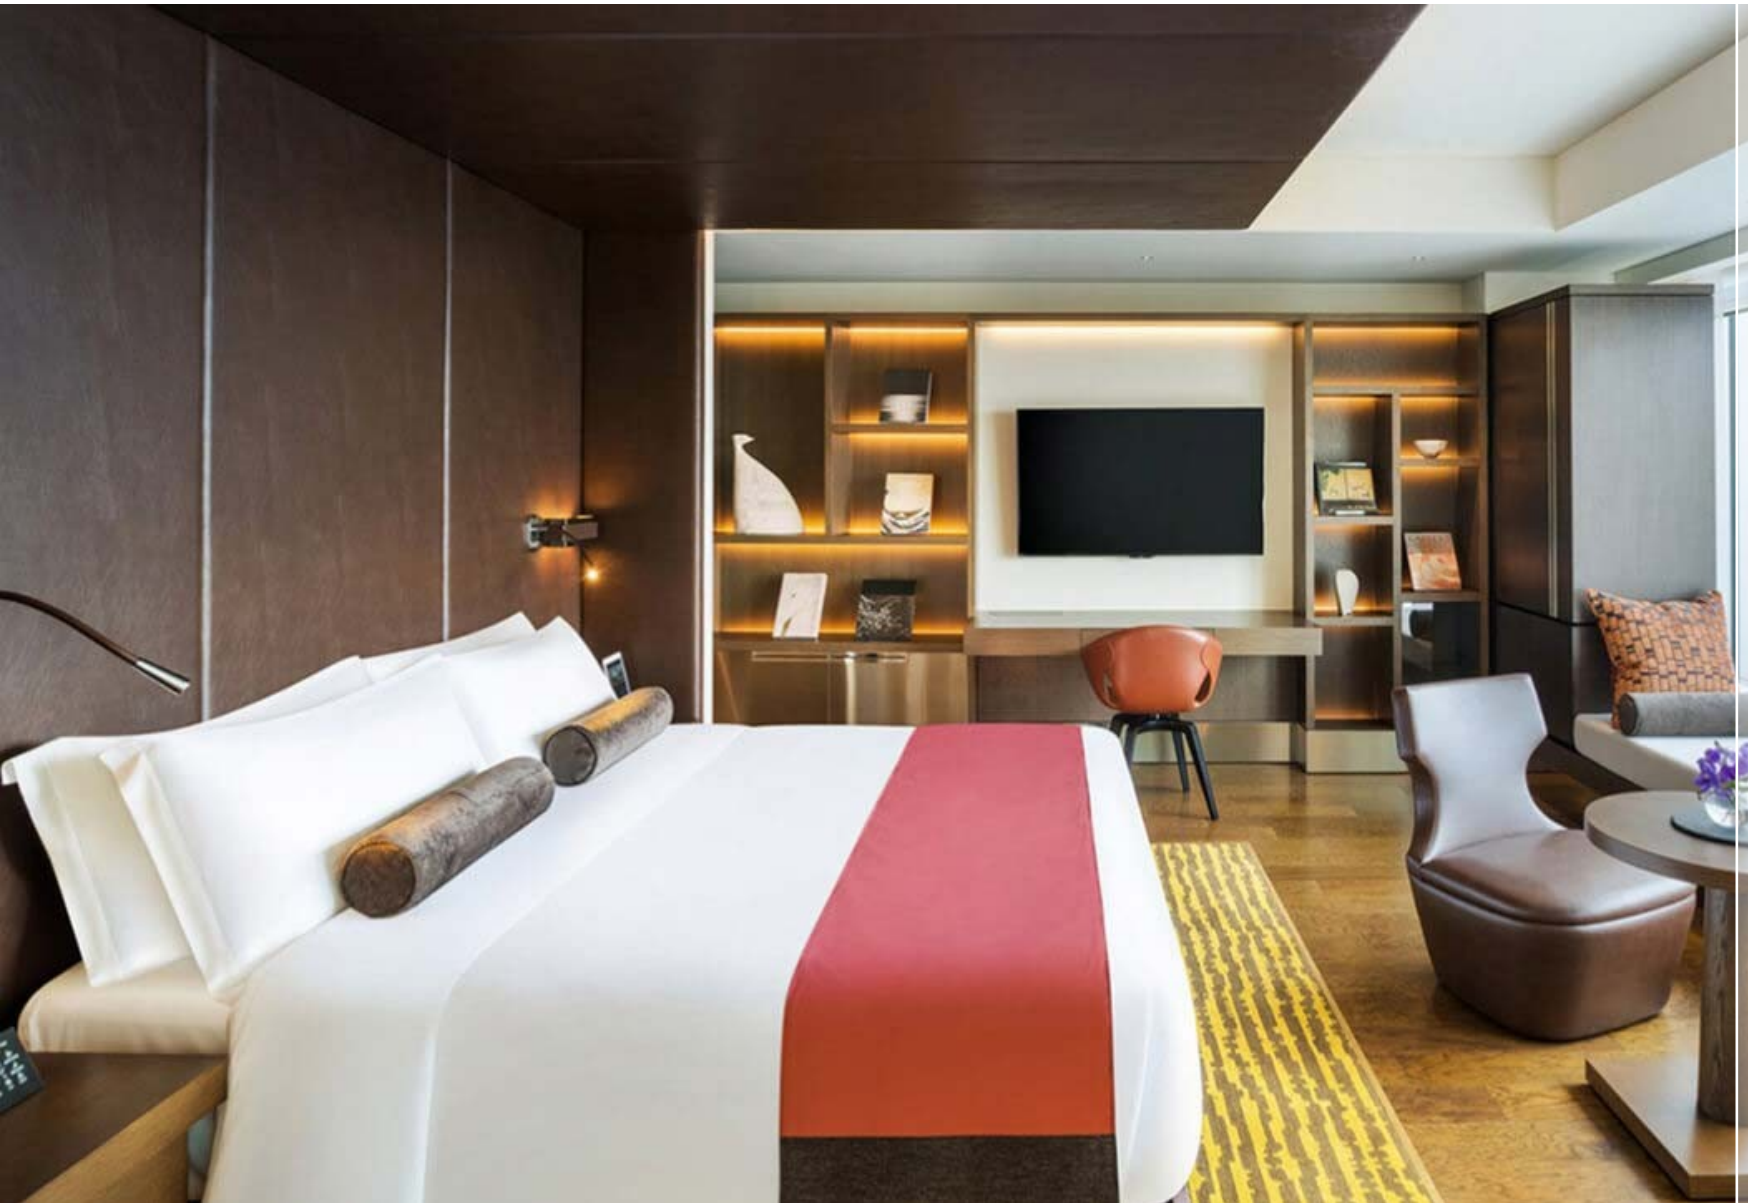

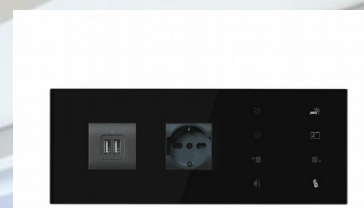

BEDSIDE CUSTOM PANEL



EXTERNAL DOORPANEL



HOTEL ROOM THERMOSTAT

| 9025 Custom Bedside Panel 2 – Sockets Modules



BLACK



WHITE

9025 Custom Bedside Panel 2 – Sockets Modules

9025 custom Bedside Panel includes the features of the Standard 9025 switch:

consists of 4 – 8 – 10 channels capacitive buttons.

Each button can be configured to manage:

On/off commands.
Dimming.
Shutters and venetians control.
Scene recall and control.
Objects sequences etc.

Device includes a 2 stage Room Temperature Controller with integrated PI to control heating and cooling equipment's, valves, 2 and 4 pipes fan coils; etc.. Device has an embedded temperature sensor and a rear 2 poles connector con garble as digital or analog input.

CODE:9025GL10C0X-B2X



https://www.eelectron.com/en/prodotto/9025-door-panel/#

eelectron

Eelectron SpA - Via Montalvenzi 6
20025 Legnano - Milano - Italy
Tel. +39 0331500802 - Fax +39 0331564826
info@eelectron.com
www.eelectron.com

9025

KNX

Made in Italy